

Zirkon® Gas Cl₂

Kuntze Gas sensors are amperometric sensors for the detection of chlorine dioxide gas. The matching fitting Ne GSH allows for an easy installation of the gas sensor.


Advantages

- > Short response times
- > High reliability
- > Simple start-up due to printed calibration value

Zirkon® Gas Cl₂



Mechanical Drawing

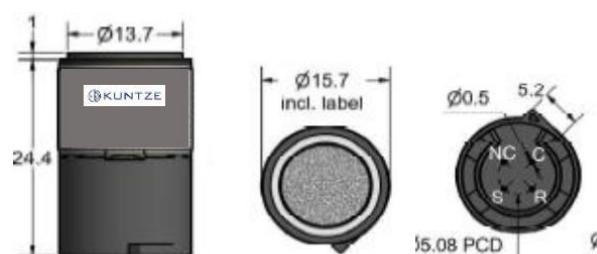

Article No.: S29111001K

Measurement Parameter

- > Chlorine gas: 0.. 20 ppm

Process conditions

- > Temperature: -20..+40 °C / -4..+104 °F
- > Humidity: 15.. 90 % rH (non condensating)
- > Storage Life: 6 months in container at 4..+10 °C/ 39..+50 °F
- > Influence of Humidity:
No effect on the zero point

Cross Sensitivity & Filter

Gas concentration	Reading after 5 min
Carbon Monoxide 100 ppm	0 ppm
Chlorine Dioxide 1 ppm	0.5 ppm
Hydrogen Sulfide 20 ppm	-2 ppm*
Hydrogen 3000 ppm	0 ppm
Isopropanol 600 ppm	0 ppm
Nitrogen Dioxide 10 ppm	<1 ppm
Sulphur Dioxide 10 ppm	0 ppm
Ozon 0.25 ppm	0.2 ppm
Chemical Filter	None

Signals below baseline are stated as 0
 * Continuous exposure at ppm level might blind the sensor.

The influencing factor can vary from sensor to sensor and over the life span of the individual sensor. No claim to completeness of the data, the sensors can potentially exhibit cross sensitivity to other gases.



Kuntze Instruments GmbH
Robert-Bosch-Str. 7a
40688 Meerbusch
Germany

+49 2150 70660
info@kuntze.com
www.kuntze.com